

GX Hydrocarbon DPC

CE Mark to Damp Proof Course EN 14909



- Suitable for use on hydrocarbon contaminated sites
- Tested against harmful gases, chemicals and hydrocarbons
- High puncture & tear resistance
- Independently tested against harmful gases, chemicals and hydrocarbons
- Proven track record on gas and hydrocarbon contaminated sites

Description

Visqueen GX DPC is a blend of ethylene co-polymers suitable for use on brownfield sites that require protection from dangerous contaminants such as hydrocarbons and methane, together with excellent damp proofing properties. GX DPC is available in 30m lengths and in two widths, 600mm or 850mm.

Application

Visqueen GX DPC has a proven track record as a barrier membrane on gas contaminated and hydrocarbon contaminated brownfield sites. Visqueen GX DPC combines high strength with flexibility.

Testing for Chemical Resistance (EN 14414 and EN 14415)

The membrane has been tested against various harmful gases and dangerous contaminants such as hydrocarbons. In addition to this, GX DPC has been subjected to accelerated life immersion tests. EN 14414 and EN 14415 - Chemical resistance to leachates and aggressive chemicals - are designed to stress the membrane at a higher level of chemical concentration and temperature than it would experience in normal use. Changes in weight, volume, tensile strength and visual degradation are recorded to obtain the membrane's suitability to the challenge chemical.

These results are published below and assist designers and engineers in the suitability of GX DPC in various applications.

System Components:

- Visqueen GX Geomembrane
- Visqueen Gas Resistant Lap Tape
- Visqueen Surface DPC Fixing System
- Visqueen GX Double Sided Bonding Tape


Installation

All joints in lengths of DPC must be a minimum of 100mm lapped and sealed with Visqueen GX Jointing Tape. Visqueen GX DPC should be installed in accordance with BS 8215: 1991, BS 8000: Part 3, 2001 and BS 5628: Part 3: 2005. Visqueen GX DPC must be bedded on both sides with fresh mortar and must project through the full width of the wall, including any externally applied rendering, and project 5mm beyond the finished external face.

Storage and Handling

Visqueen GX DPC is classified as nonhazardous when used in accordance with the relevant British Standards. The product is chemically inert and is not affected by acids and alkalis that may be present in the sub-soils.

Technical Data and CE Mark

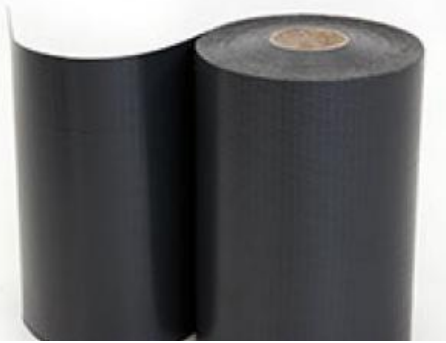


GX Hydrocarbon DPC CE Mark to Damp Proof Course EN 14909

Visqueen GX Hydrocarbon Damp Proof Course complies with the requirements and clauses of EN 14909 - Flexible sheets for waterproofing - Plastic and rubber damp proof courses - Definitions and characteristics.

Visqueen GX Hydrocarbon Damp Proof Course products are manufactured under a Quality Management System (ISO 9001) - Certificate of Compliance reference no. 4560-3 by Knight International applies.



GX Hydrocarbon DPC

CE Mark to Damp Proof Course EN 14909

Product Data

Product Data

heading	Characteristic	Test method	Units	Compliance criteria	Value or Statement
	Length	EN 1848-2	m	-0/+10%	30
	Width	EN 1848-2	m	-0/+10%	600 850
	Thickness	EN 1849-2	mm	+/-20%	1
	Mass	EN 1849-2		-12%/+12%	974
	Tensile Strength - MD	EN EN12311	N/mm2	>MLV	22
	Tensile Strength - CD	EN EN12311	N/mm2	>MLV	20
	Tensile Elongation - MD	EN EN12311	%	>MLV	799
	Tensile Elongation - CD	EN EN12311	%	>MLV	848
	Joint Strength	EN12317-2	N	>MLV	515
	Watertightness - 2kPa	EN 1928	-	Pass/Fail	Pass
	Resistance to impact	EN 12691	mm	>=MLV	600
	Resistance to static loading	EN 12730	kg	MLV	Pass-20
	Resistance to Nail tear - MD	EN 12310-1	N	>=MLV	705
	Resistance to Nail tear - CD	EN 12310-1	N	>=MLV	745
	Durability-Heat ageing	EN 1296	-	Pass/Fail	Pass
	Durability-Chemical resistance	EN 1847	-	Pass/Fail	Pass
	Resistance to Low temperature	EN 495-5		MDV	Pass at - 40oC
	Water vapour transmission - resistance	EN 1931	MNs/g	MDV	1171
	Water vapour permeability	EN 1932		MDV	0.11
	Reaction to Fire	EN 13501-1	Class	MDV	F
	Methane Permeability	ISO2782		MDV	0.198
	Diesel Permeability	ISO 6179		MDV	0.4
	Petrol Permeability	ISO 6179		MDV	8.6
	Xylene Permeability	ISO 6179		MDV	14.6
	Toluene Permeability	ISO 6179		MDV	23
	Chemical Resistance - Acids	EN 14414-A	-	Pass/Fail	Pass
	Chemical Resistance - Alkalies	EN 14414-B	-	Pass/Fail	Pass
	Chemical Resistance - Organic Solvents	EN 14414-C	-	Pass/Fail	Pass
	Chemical Resistance - Visual Defects	EN 14414	-	Pass/Fail	Pass
	Resistance to Leaching - Hot Water	EN 14415-A	-	Pass/Fail	Pass
	Resistance to Leaching - Aqueous alkaline liquids	EN 14415-B	-	Pass/Fail	Pass
	Resistance to Leaching - Organic alcohols	EN 14415-C	-	Pass/Fail	Pass
	Resistance to Leaching - Visual Defects	EN 14415-A	-	Yes/No	No



GX Hydrocarbon DPC

CE Mark to Damp Proof Course EN 14909

Appendix A



Visqueen Building Products

Visqueen is the market leader in the manufacture and supply of structural waterproofing and gas protection systems. Visqueen offers the complete package - a proven, reliable range backed by a technical support service that goes unmatched in the market - everything you would expect from a reputable and ethical company.

System Accessories

To ensure full waterproofing protection please use the following certified system components:

- Visqueen High Performance (HP) Tanking Primer
- Visqueen TreadGUARD1500
- Visqueen Protect&Drain
- Visqueen Top Hat Unit

Downloads Library

- Technical Datasheet
- Declaration of Performance
- Visqueen's Guide to CE Marking

Find your local stockist

Search our directory of Visqueen specification Stocking Centres to locate your nearest Visqueen Partner.

Distributor Support

Our specification Stocking Centres can access a free library of sales support tools, bespoke catalogues and more, [click here](#).

Technical support throughout your project

We are specialists in our field and can help you specify the correct solutions with the necessary performance levels, in accordance with building regulations.

- Nationwide site support team
- Specification advice
- Installation guidance & project sign off
- System design including CAD details

